Town of Vass Application for Driveway Connection


A COPY OF THIS APPLICATION MUST BE PLACED IN THE PERMIT BOX:

Application is hereby made to the Town of Vass to install a driveway connection from the property line to the street: or alley at the address listed below:


Mailing Address:	policiani de la companya de la comp					
GENERAL CONRACTOR:	License #					
Mailing Address:		eabling of the state of the sta				
	Fax Number:					
	Address:					
Zoning District:						
Parcel ID:	PIN;	Impervious Surface (%)				
If Applicant is applying for r be completed.	nultiple driveway conr	nections at existing property, this item mus				
Parcel ID:	PIN:	Impervious Surface (%)				
NOTE: Parcel ID & PIN Nu	mbers are found on M	Moore County Tax Bill or their website				
nttp://mooregisweb.moorecou	ntync.gov/ConnectGI	Σ				
opography ofLot						
Type of Connection at first fi	fteen feet: Concrete Asphalt A					

NOTE: APPROVED DIAGRAM ATTACHED

Applicant Signature:			
Office Use Only			
The proposed driveway connection is perm	itted subject to the following conditions:		
Sod entire right of way 15 feet deep-no	higher than the roadway		
Keep swale though ditch line & drivewa	ny		
Swale minimum of 6 inches deep- botton	of swale minimum 6 foot from edge road		
Owner to maintain sod after closing*			
Add 15", 18" or 24" pipe - all pipes mu	st be concrete with flare ends		
Add riprap breaks			
Town of Vass not responsible for water	draining onto property due to topo of lot		
No irrigation system shall be installed vunless approved by the Town of Vass. Other:	within 10 feet of curbs or edges of pavemen		
48 HOURS NOTICE MUST BE GIVEN FOR FINE ENTIRE DOCUMENT <i>TO</i> the Town of Vass @	NAL INSPECTION REQUEST - FAX		
Signature for proposed driveway approval	Date		
Comments:			
*********	**************		
Final Driveway inspection Approved Yes []	No []		
	Date:		

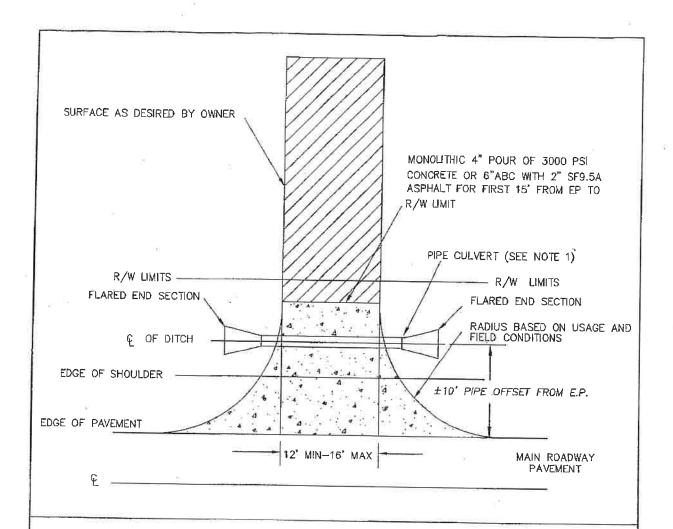

WITH UNPAVED ROADSIDE DITCH



NOTES:

- IF REQUIRED BY THE VILLAGE, PIPE TO BE RCP, 15" MINIMUM, AND SIZED TO CARRY THE DESIGN FLOW OF THE DITCH.
- 2. 6" MINIMUM COVER OVER PIPE.
- 3. STEEPER SLOPES CAN BE ALLOWED WHERE SPECIAL STABILIZATION IS PROVIDED IN ACCORDANCE WITH EROSION AND SEDIMENTATION CONTROL ORDINANCE.
- 4. USE 5' VERTICAL CURVE FOR TRANSITION.
- 5. IF REQUIRED BY THE VILLAGE INFRASTRUCTURE SUPERINTENDENT, SOD SHALL ALSO BE PLACED ALONG FRONTAGE WITHIN THE VILLAGE RIGHT-OF-WAY, FINISHED GRADE OF SOD TO BE 1" BELOW EDGE OF RCADWAY.

REV	DESCRI	PTION		DATE	APPROVED BY
\triangle				12/15	MSA
NOT	TO COULE	Inua			
NOI	IO SCALE	DWG	NO.	4.06-A	SHEET 1 OF 1

RESIDENTIAL
DRIVEWAY APRON
ON NON C&G STREETS